


TCL PRO 230




HARDOX®
WEAR PLATE

**ADAPTIVE
GEOMETRY**
PATENTED

**ANTI
BLOCKAGE
SYSTEM**




Trinciatrice autolivellante al terreno
Self-leveling on the ground flail mower
Mulcher mit Selbstniveauregulierung zum Boden
Broyeur auto nivellement au terrain
Trituradoras autonivelantes al suelo



Antistrappo passivo
Passive safety impac device
Reißfest System passiv
Anti choc passif
Antichoque pasivo



- A Ø 479 mm
- B Ø 159 mm
- C Ø 194 mm
- V 48 m/sec



Dotazioni di serie

- Attacco al trattore Cat.3
- Trasmissione a bagno d'olio con ruota libera
- Piedini di appoggio
- Cinghie dentate
- Cuscinetti rotore a doppia sfera oscillante
- Rotore Bilanciato elettronicamente
- Rullo di appoggio con raschia rullo regolabile in altezza
- Giunto cardanico
- Protezione Carter
- Snodo per auto livellamento al terreno

Standard equipment

- Tractor linkage Cat.3
- Oil sealed transmission with free wheel
- Rest
- Toothed belts
- Rotor bearings with double oscillating sphere
- Electronically balanced rotor
- Supporting roller with adjustable in height scraper
- P.T.O. shaft
- Protecting carter
- Junction for self levelling on the ground

Standardausstattung


- Traktor Anhängung Kat.3
- Ölbad-Getriebe mit Freilauf
- Stützfüsse
- Gezackte Treibriemen
- Rotor Lager mit doppel-schwankenden Kugeln
- Rotor elektronisch balanciert
- Verstellbare Stützwalze selbstreinigend mit Erdkratzer
- Gelenkwelle
- Schütz
- Kupplung zum Boden Selbst-Nivellierung

Équipement de série

- Attelage tracteur Cat.3
- Transmission bain d'huile avec roue libre
- Pieds d'appui
- Courroies dentées
- Roulements rotor à double sphère oscillante
- Rotor équilibré électroniquement
- Rouleau d'appui avec décrotoir réglable en hauteur
- Cardan
- Protection carter
- Jonction pour auto nivellement au terrain

Equipamiento estándar

- Conexión Cat. 3
- Transmisión con rueda libre
- Apoyos
- Correas dentadas
- Rodamientos oscilantes de bolas doble (rotor)
- Rotor balanceado electronicamente
- Rodillo de apoyo con raspador ajustable
- Junto cardán
- Protección carter
- Unión autonivelante al suelo

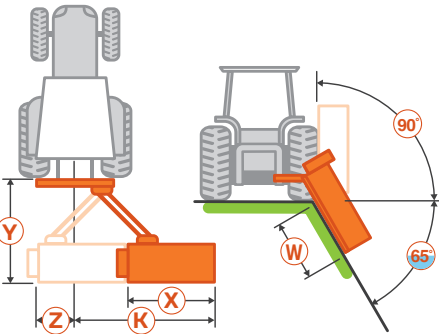

	X	Y	Z	K	W
	cm	cm	cm	cm	cm
TCL PRO 230	234	222	45	351	236



Mazza doppio tagliente
Double cutting hammer
Hammerschlegel mit doppelt Schnitt
Marteau à double tranchant
Martillo de doble corte



Ruota Anti-Intasamento
Anti-Obstruction Wheel
Antiverstopfungsrad
Roue anti-engouffrement
Rueda anti bloqueo

	 A - B - C (mm)	 mm - inch	 G/min	 CV - KW	 N°	 Kg - lb	 N°	 N°
TCL PRO 230	2810 - 1950 - 1040	2260 - 89	540	100 - 75	4	877 - 1963	52	26